




OPTIC OPTIONS

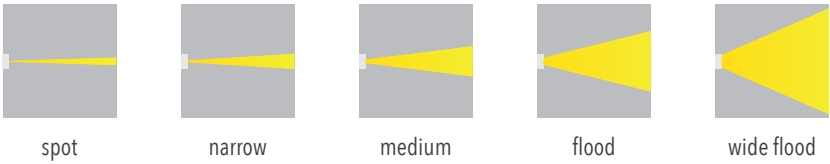

LIGHT SOURCE

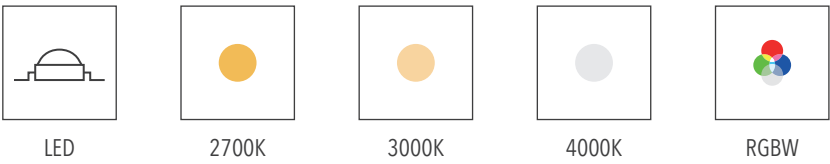


CONTROL OPTIONS

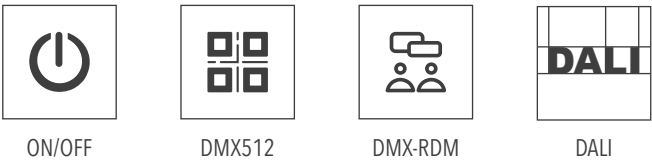

FINISH COLORS



INSTALLATION

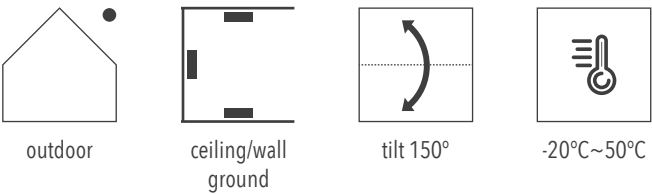

PALLAS




THE ESSENTIAL ELEMENT

Well designed LED spotlight with essential and round element that fits perfectly for illuminating trees and green areas. The luminaire features two sizes with four different mounting options, efficient optical system combined with built-in honeycomb louvre for maximum visual comfort. Breather valve technology used for improving performance working in outdoor environments.

Material: aluminum body with polycarbonate lens and tempered glass





**QUICKINFO**

Floodlight 18W, 18 high-power LEDs  
Input voltage AC100-240V  
Complete with built-in power supply

CE


IP66






IK07


**DIMENSIONS**

160

270



CODE	Optic	Light color	Control	Finish color	Luminous flux
0818W18	 spot 8° 0008	<div><div>2700K 2780</div></div>	ON/OFF	<div><div>silver 01</div></div>	1,200lm
	 narrow 15° 0015	<div><div>3000K 3080</div></div>			
	 medium 30° 0030	<div><div>4000K 4080</div></div>			
	 flood 40° 0040				
	 wide flood 60° 0060				



**QUICKINFO**

Floodlight 36W, 15 high-power LEDs  
Input voltage AC100-240V  
Complete with built-in power supply

CE


IP66






IK07


**DIMENSIONS**

160

270



CODE	Optic	Light color	Control	Finish color	Luminous flux
0818W36	 spot 8° 0008	<div><div>2700K 2780</div></div>	ON/OFF	<div><div>silver 01</div></div>	2,500lm
	 narrow 15° 0015	<div><div>3000K 3080</div></div>			
	 medium 30° 0030	<div><div>4000K 4080</div></div>			
	 flood 40° 0040				
	 wide flood 60° 0060				



**QUICKINFO**

Floodlight 36W, 16 high-power LEDs  
Input voltage AC100-240V  
Complete with built-in power supply

CE


IP66






IK07


**DIMENSIONS**

160

270



CODE	Optic	Light color	Control	Finish color	Luminous flux
0818W36	 spot 8° 0008	<div><div>RGBW RGBW</div></div>	DMX512	<div><div>silver 01</div></div>	1,600lm
	 narrow 15° 0015				
	 medium 30° 0030				
	 flood 40° 0040				
	 wide flood 60° 0060				



**QUICKINFO**

Floodlight 60W, 24 high-power LEDs  
Input voltage AC100-240V  
Complete with built-in power supply

CE


IP66






IK07













**DIMENSIONS**











250






350



CODE	Optic	Light color	Control	Finish color	Luminous flux
0818W60	 spot 8° 0008	<div><div>2700K 2780</div></div>	ON/OFF	<div><div>silver 01</div></div>	4,200lm
	 narrow 15° 0015	<div><div>3000K 3080</div></div>			
	 medium 30° 0030	<div><div>4000K 4080</div></div>			
	 flood 40° 0040				
	 wide flood 60° 0060				

<div></div> <div><div>QUICKINFO</div><div>Floodlight 80W, 36 high-power LEDs Input voltage AC100-240V Complete with built-in power supply</div><div><div>CE</div><div>IP66</div><div>IK07</div><div></div><div></div></div></div> <div><div>DIMENSIONS</div><div></div></div>					
CODE	Optic	Light color	Control	Finish color	Luminous flux
0818W80	 spot 8° 0008	 2700K 2780	ON/OFF	 silver 01	5,600lm
	 narrow 15° 0015	 3000K 3080			
	 medium 30° 0030	 4000K 4080			
	 flood 40° 0040				
	 wide flood 60° 0060				

<div></div> <div><div>QUICKINFO</div><div>Floodlight 90W, 48 high-power LEDs Input voltage AC100-240V Complete with built-in power supply</div><div><div>CE</div><div>IP66</div><div>IK07</div><div></div><div></div></div></div> <div><div>DIMENSIONS</div><div></div></div>					
CODE	Optic	Light color	Control	Finish color	Luminous flux
0818W90	 spot 8° 0008	 RGBW RGBW	DMX512	 silver 01	4,100lm
	 narrow 15° 0015				
	 medium 30° 0030				
	 flood 40° 0040				
	 wide flood 60° 0060				

		<div>0818A1</div> <div>ground-kit</div> <div>aluminum</div>			<div>0818A2</div> <div>ground-kit</div> <div>aluminum</div>
		suitable for models Ø160mm			suitable for models Ø250mm
		<div>0818A3</div> <div>pole-adapter</div> <div>aluminum</div>			<div>0818A4</div> <div>tree strap</div> <div>stainless</div>
		suitable for all models			suitable for all models
		<div>0818A5</div> <div>anti-glare glass</div> <div>tempered</div>			suitable for all models with different sizes





FLOODLIGHTS . DAOU 2022

