




OPTIC OPTIONS

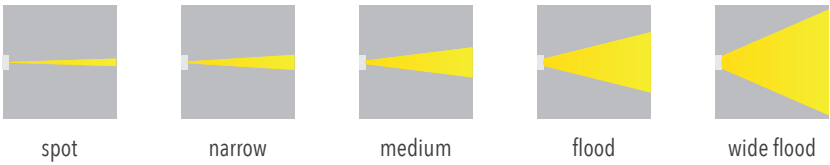


LIGHT SOURCE

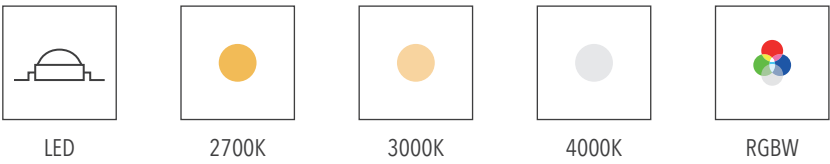


CONTROL OPTIONS

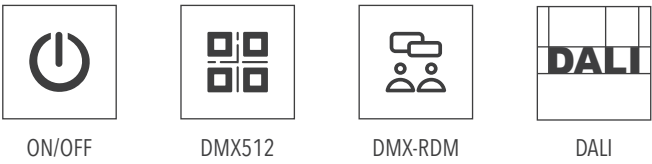


FINISH COLORS



INSTALLATION

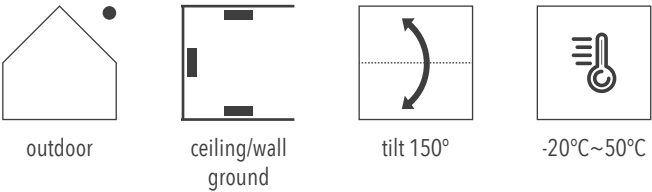

SERRA

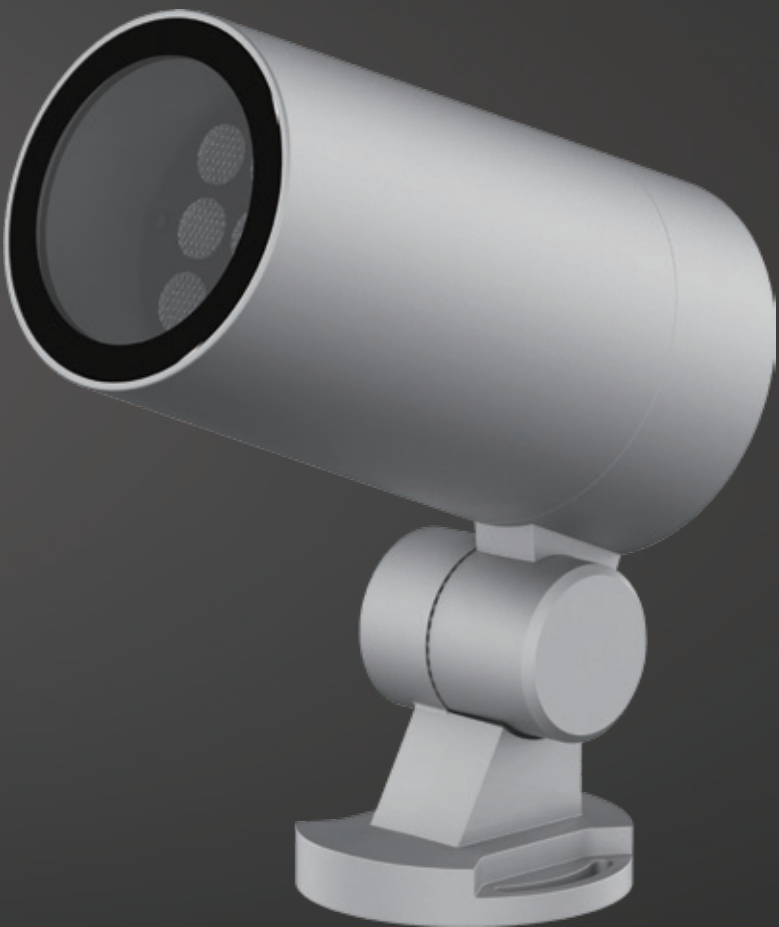


PERSONALITY FOR SPACE

Round LED spotlight for installation in architectural, hospitality and living areas, with minimal and neat design. Available in two sizes, it can be mounted on surfaces, poles. Recessed optical system reduces light glare, also this luminaire can be equipped a visor for maximum visual comfort. Breather valve technology makes this luminaire perform well in outdoor environments.

Material: aluminum body with polycarbonate lens and tempered glass





QUICKINFO

Floodlight 6W, 6 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

CE


IP66










IK07


DIMENSIONS

103

270



CODE	Optic	Light color	Control	Finish color	Luminous flux
0811W6	 spot 8° 0008	 2700K 2780	ON/OFF	 silver 01	420lm
	 narrow 15° 0015	 3000K 3080			
	 medium 30° 0030	 4000K 4080			
	 flood 40° 0040				
	 wide flood 60° 0060				



QUICKINFO

Floodlight 12W, 6 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

CE


IP66










IK07


DIMENSIONS

103

270



CODE	Optic	Light color	Control	Finish color	Luminous flux
0811W12	 spot 8° 0008	 2700K 2780	ON/OFF	 silver 01	840lm
	 narrow 15° 0015	 3000K 3080			
	 medium 30° 0030	 4000K 4080			
	 flood 40° 0040				
	 wide flood 60° 0060				



QUICKINFO

Floodlight 18W, 7 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

CE


IP66










IK07


DIMENSIONS

103

270



CODE	Optic	Light color	Control	Finish color	Luminous flux
0811W18	 spot 8° 0008	 2700K 2780	ON/OFF	 silver 01	1,260lm
	 narrow 15° 0015	 3000K 3080			
	 medium 30° 0030	 4000K 4080			
	 flood 40° 0040				
	 wide flood 60° 0060				



QUICKINFO

Floodlight 24W, 3 high-power LEDs (4-in-1)
Input voltage AC100-240V
Complete with built-in power supply

CE


IP66








IK07

DIMENSIONS

103

270



CODE	Optic	Light color	Control	Finish color	Luminous flux
0811W24	 spot 8° 0008	 RGBW RGBW	DMX512	 silver 01	1,100lm
	 narrow 15° 0015				
	 medium 30° 0030				
	 flood 40° 0040				
	 wide flood 60° 0060				




QUICKINFO

Floodlight 36W, 9 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply



DIMENSIONS

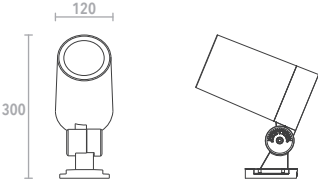

CODE	Optic	Light color	Control	Finish color	Luminous flux
0811W36	spot 8° 0008	2700K 2780	ON/OFF	silver 01	2,500lm
	narrow 15° 0015	3000K 3080			
	medium 30° 0030	4000K 4080			
	flood 40° 0040				
	wide flood 60° 0060				




QUICKINFO

Floodlight 50W, 6 high-power LEDs (4-in-1)
Input voltage AC100-240V
Complete with built-in power supply



DIMENSIONS

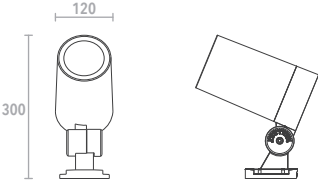

CODE	Optic	Light color	Control	Finish color	Luminous flux
0811W50	spot 8° 0008	RGBW RGBW	DMX512	silver 01	2,200lm
	narrow 15° 0015				
	medium 30° 0030				
	flood 40° 0040				
	wide flood 60° 0060				




0811A1 anti-glare visor **aluminum**
suitable for models Ø103mm



0811A2 anti-glare visor **aluminum**
suitable for models Ø120mm



0811A3 pole-adaptor **aluminum**
suitable for all models



0811A4 anti-glare glass **tempered**
suitable for all models with different sizes

