


UNI-LINE

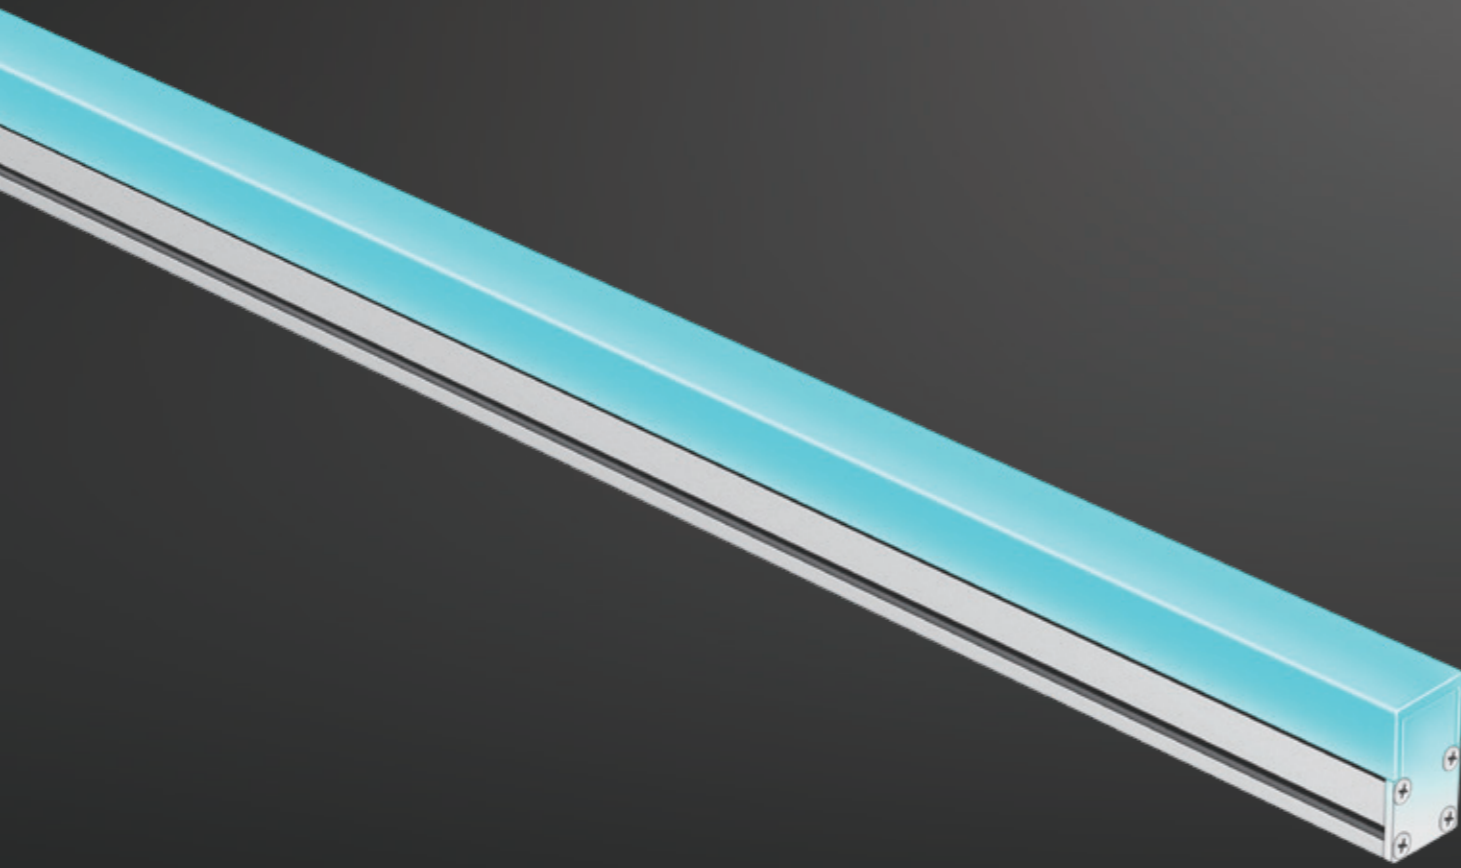

CONTOURING THE ARCHITECTURES

Exterior rated and slim sized LED luminaire designed for outdoor facade lighting with direct-view light line, highlighting the characters of building in the dark. The luminaire is perfect for both contemporary and historical architecture illumination to provide an impressive contour and accent lighting effect. Seamless end-to-end connection, continuous line of illumination with no dark area between luminaires.

Material: aluminum body with polycarbonate diffuser



OPTIC OPTIONS




wide flood


LIGHT SOURCE




LED



2700K



3000K



4000K



RGB



RGBW

CONTROL OPTIONS



ON/OFF



DMX512



DMX-RDM



DALI

FINISH COLORS



silver




RAL
on request

INSTALLATION




outdoor




ceiling/wall
ground



-20°C~50°C

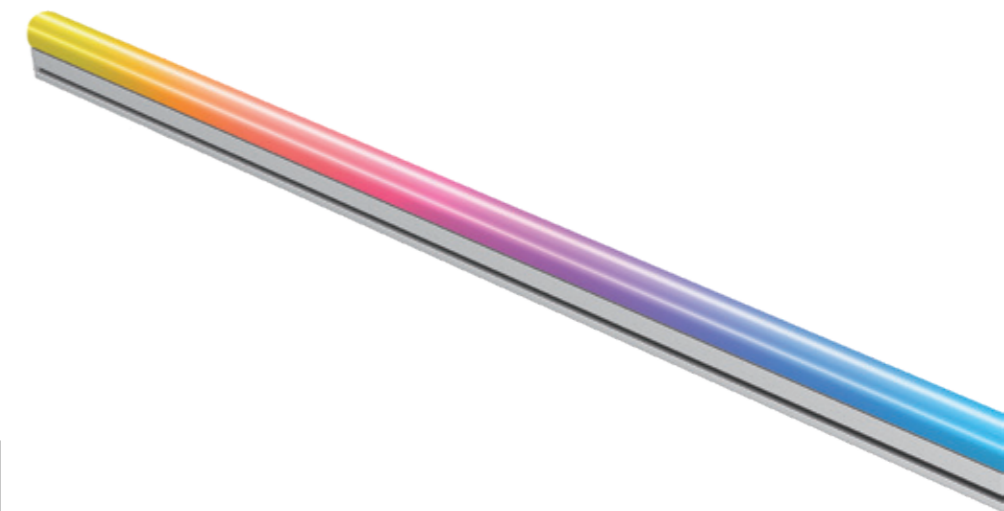

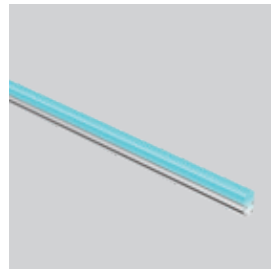


QUICKINFO

Direct-view luminaire 15W, 48 LEDs
 Input voltage DC24V
 C.V. power supply ordered separately
 Flat diffuser, customized length on request

DIMENSIONS



CODE	Optic	Light color	Control	Finish color	Luminous flux
2607W15	wide flood 120° 0120	2700K 2780	ON/OFF	● silver 01	1,100lm
		3000K 3080			
		4000K 4080			
		RGB RGB	DMX512	600lm	
		RGBW RGBW		680lm	

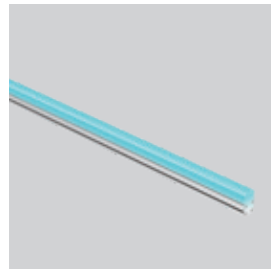

QUICKINFO

Direct-view luminaire 15W, 48 LEDs
 Input voltage DC24V
 C.V. power supply ordered separately
 Dome diffuser, customized length on request

DIMENSIONS



CODE	Optic	Light color	Control	Finish color	Luminous flux
2608W15	wide flood 120° 0120	2700K 2780	ON/OFF	● silver 01	1,100lm
		3000K 3080			
		4000K 4080			
		RGB RGB	DMX512	600lm	
		RGBW RGBW		680lm	



