


# YORK M

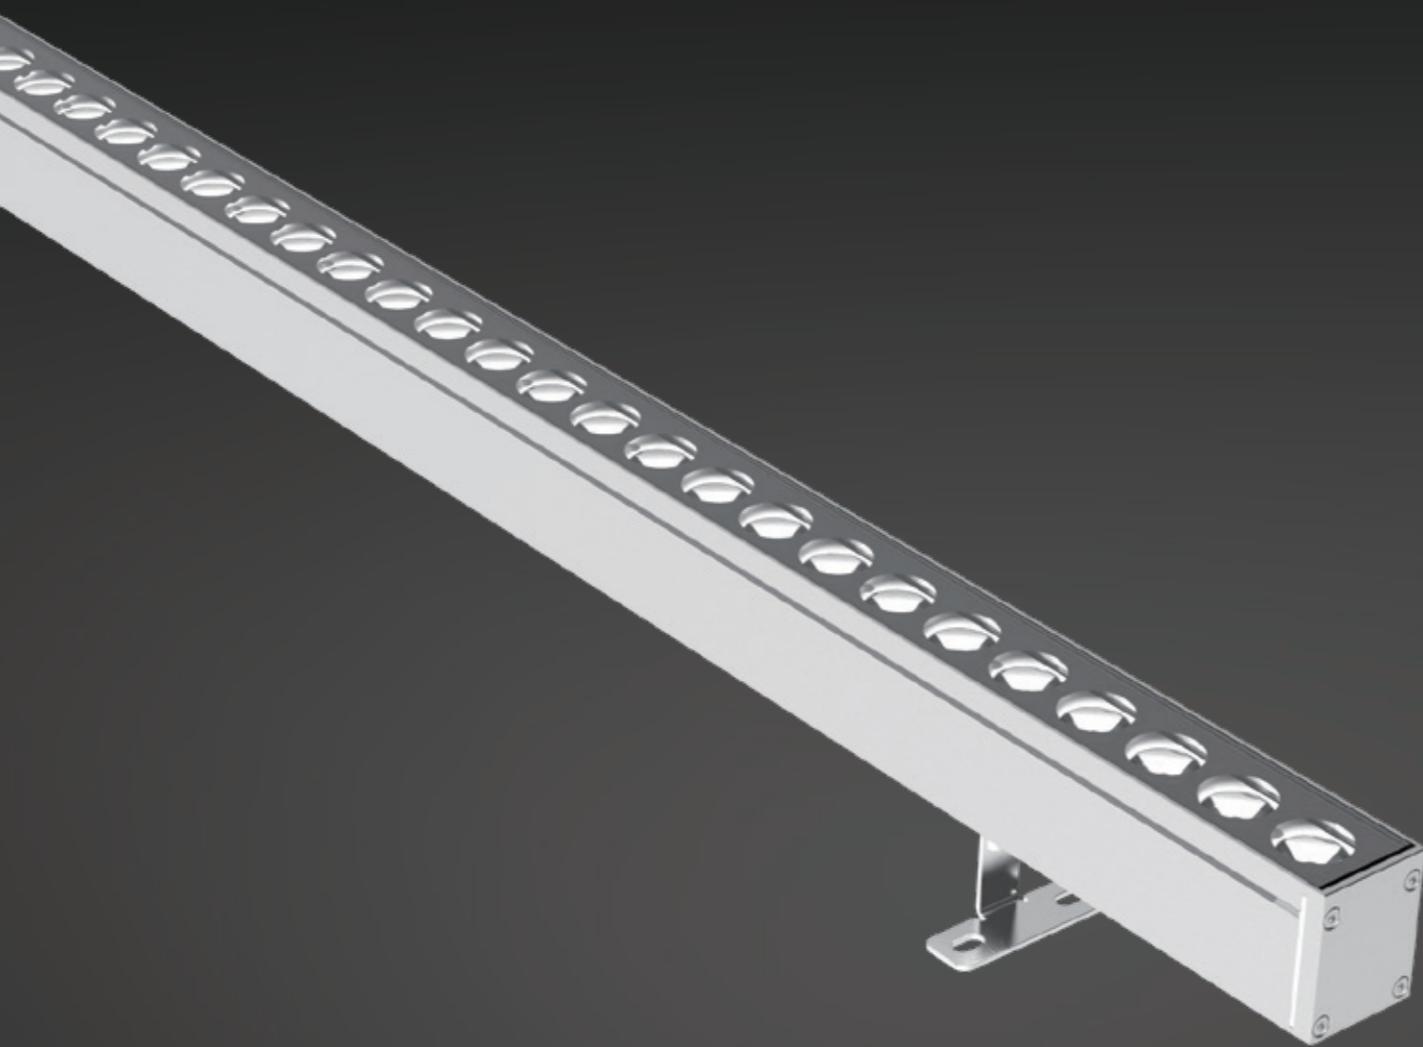


## HIGHLIGHT BUILDING AT NIGHT

Exterior rated linear LED luminaire for wall grazing and washing lighting applications on medium sized facades. Standard length 1000mm and customized lengths on request. Uniform light color coverage even on close-up installations thanks to PMMA optical system. Continuous line, no shadow where the luminaires are jointed. The luminaire can be supplied with anti-glare accessories for improving visual comfort.


Material: aluminum body with PMMA lens and tempered glass




### OPTIC OPTIONS

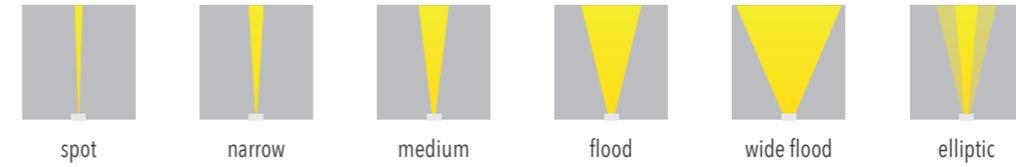


### LIGHT SOURCE

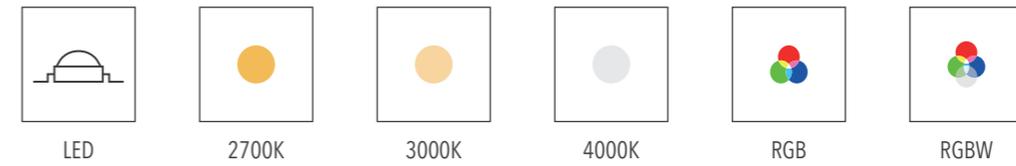


### CONTROL OPTIONS

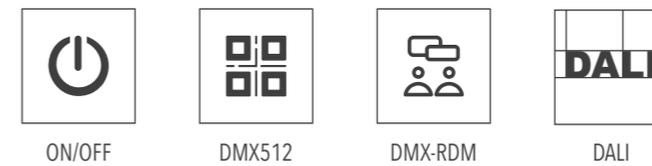

### FINISH COLORS



### INSTALLATION

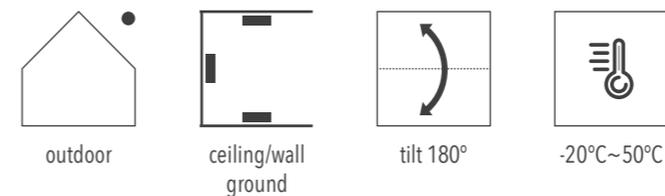




**QUICKINFO**

Wall washer 48W, 36 high-power LEDs  
 Input voltage DC24V  
 C.V. power supply ordered separately  
 Customized length on request



**DIMENSIONS**



CODE	Optic	Light color	Control	Finish color	Luminous flux	
2502W48	spot 7° <b>0007</b>	2700K <b>2780</b>	ON/OFF	silver <b>01</b>	3,800lm	
	narrow 15° <b>0015</b>	3000K <b>3080</b>				
	medium 30° <b>0030</b>	4000K <b>4080</b>				
	flood 45° <b>0045</b>	RGB <b>RGB</b>	DMX512			1,900lm
	wide flood 60° <b>0060</b>	RGBW <b>RGBW</b>				2,100lm
	elliptic 20°x40° <b>2040</b>					



**2502A1** anti-glare visor **aluminum**



**2502A2** anti-glare grille **PC**



