


YORK S

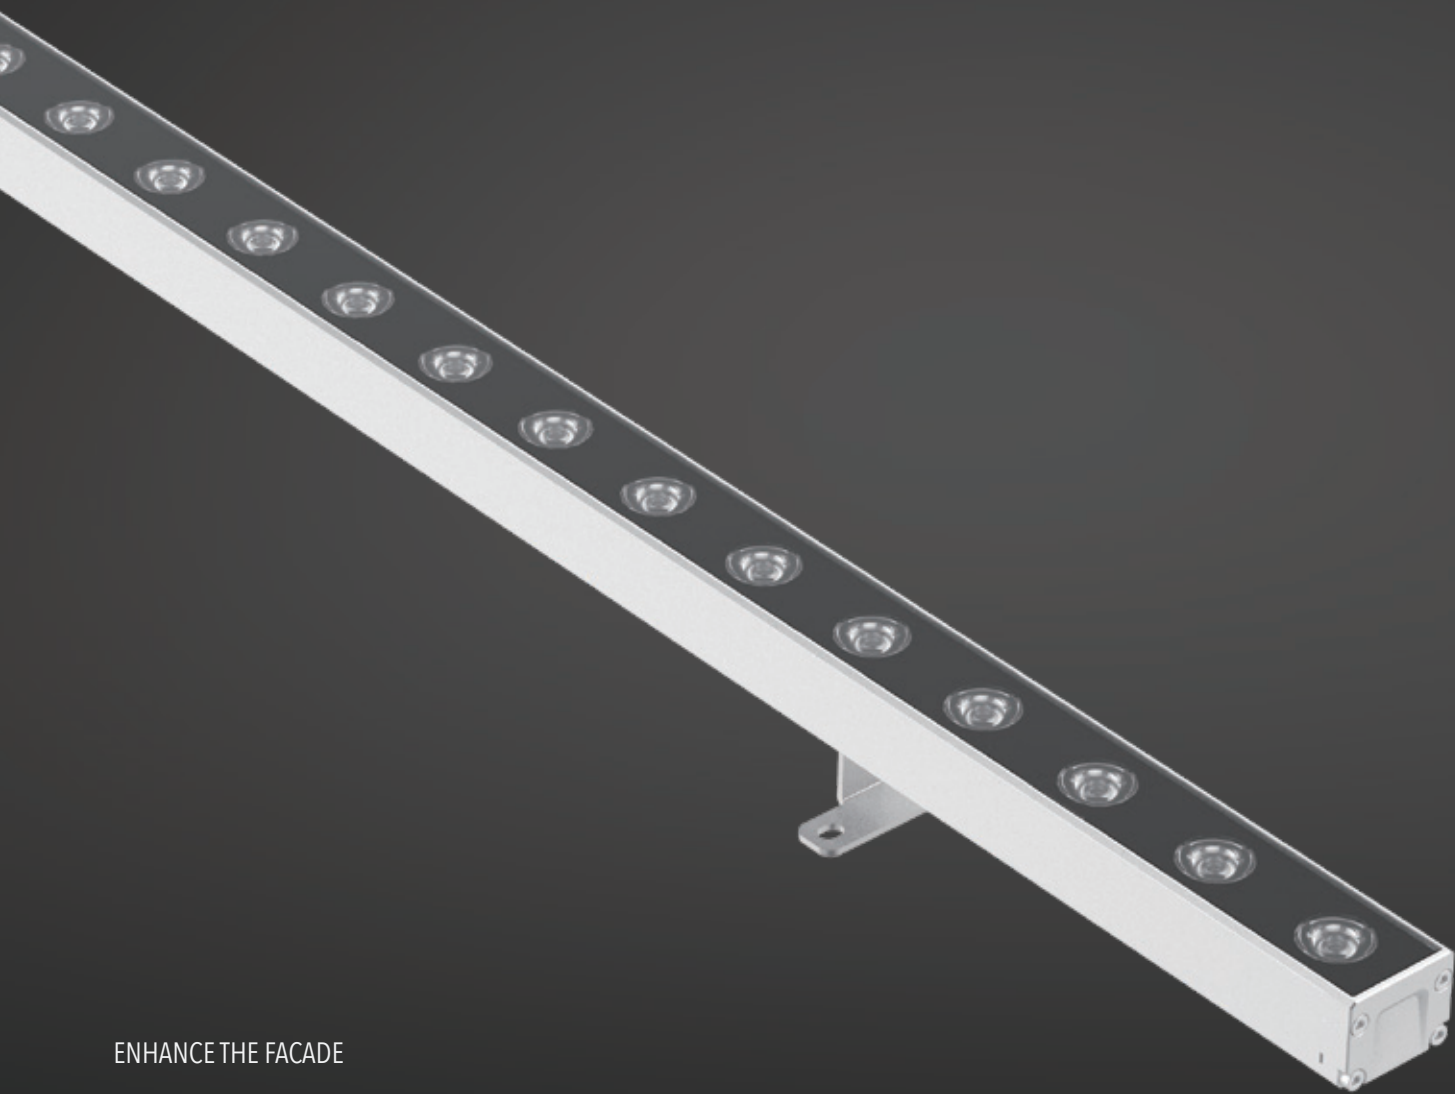


ENHANCE THE FACADE

Exterior rated linear LED luminaire with compact size, for wall grazing and washing lighting applications on small facades. Available in standard length 1000mm and customized lengths on request. Uniform light color coverage even on close-up installations thanks to PMMA optical system. Continuous line, no shadow where the luminaires are jointed.


Material: aluminum body with PMMA lens and tempered glass




OPTIC OPTIONS

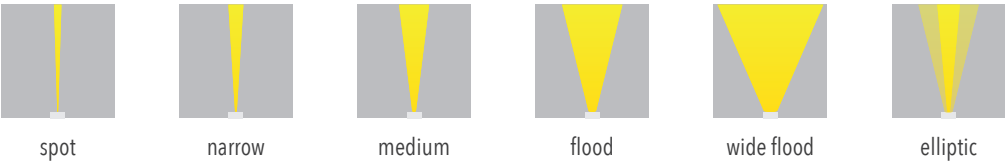


LIGHT SOURCE

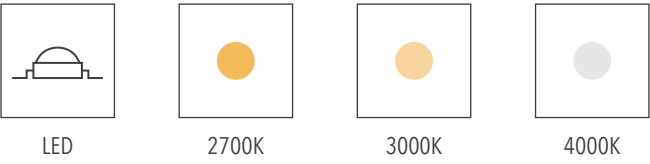



CONTROL OPTIONS



FINISH COLORS



INSTALLATION

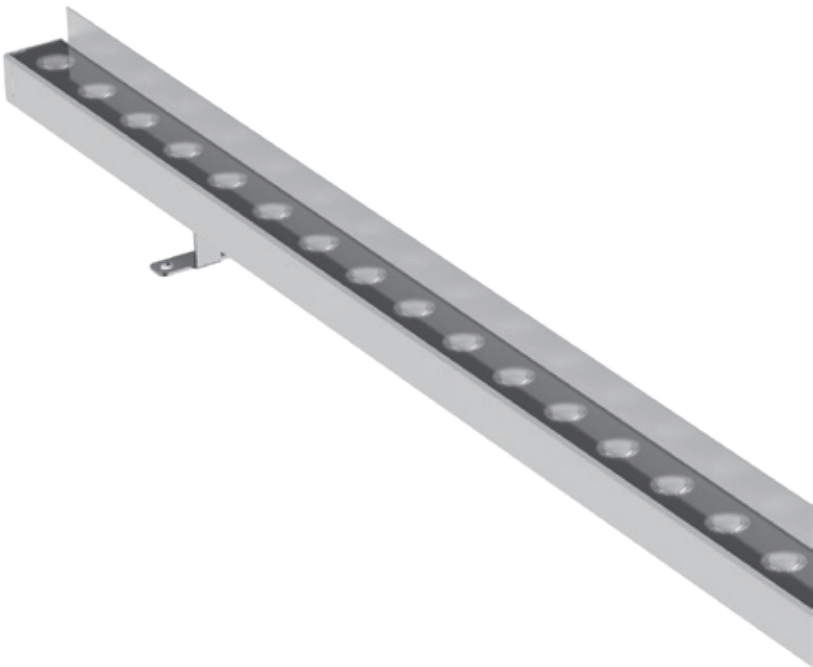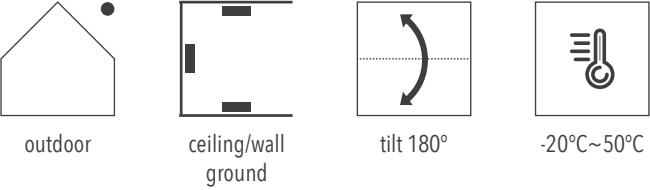



QUICKINFO


Wall washer 18W, 18 high-power LEDs
Input voltage DC24V
C.V. power supply ordered separately
Customized length on request

CE

IP66

IK07

DIMENSIONS



CODE	Optic	Light color	Control	Finish color	Luminous flux
2506W18	 spot 7° 0007	 2700K 2780	ON/OFF	 silver 01	1,400lm
	 narrow 15° 0015	 3000K 3080			
	 medium 30° 0030	 4000K 4080			
	 wide flood 60° 0060				
	 elliptic 25°x60° 2560				



QUICKINFO


Wall washer 36W, 36 high-power LEDs
Input voltage DC24V
C.V. power supply ordered separately
Customized length on request

CE

IP66

IK07

DIMENSIONS



CODE	Optic	Light color	Control	Finish color	Luminous flux
2506W36	 spot 7° 0007	 2700K 2780	ON/OFF	 silver 01	2,800lm
	 narrow 15° 0015	 3000K 3080			
	 medium 30° 0030	 4000K 4080			
	 wide flood 60° 0060				
	 elliptic 25°x60° 2560				



QUICKINFO


Wall washer 24W, 24 high-power LEDs
Input voltage DC24V
C.V. power supply ordered separately
Customized length on request

CE

IP66

IK07

DIMENSIONS



CODE	Optic	Light color	Control	Finish color	Luminous flux
2506W24	 spot 7° 0007	 2700K 2780	ON/OFF	 silver 01	1,900lm
	 narrow 15° 0015	 3000K 3080			
	 medium 30° 0030	 4000K 4080			
	 wide flood 60° 0060				
	 elliptic 25°x60° 2560				



2506A1

anti-glare visor

aluminum

suitable for all models

