

OPTIC OPTIONS




elliptic


LIGHT SOURCE



LED



2700K



3000K



4000K

CONTROL OPTIONS



ON/OFF



DALI

FINISH COLORS




silver




RAL
on request

INSTALLATION



outdoor




ground



-20°C~50°C

SONAX WASH

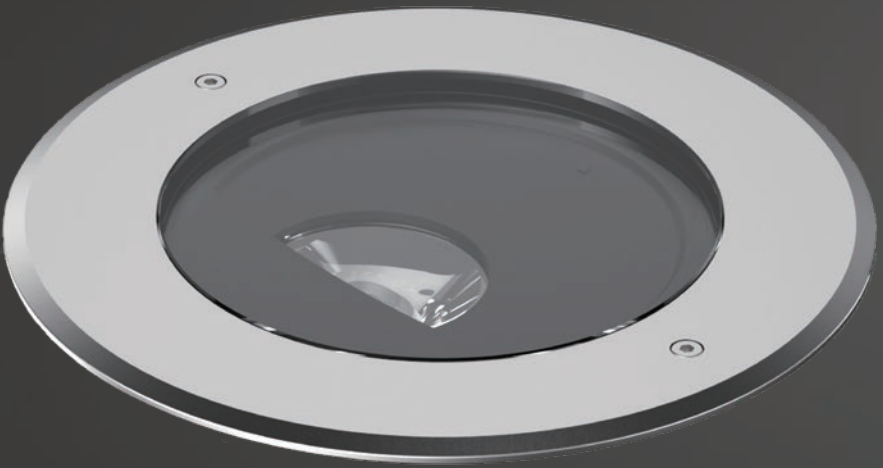


IN-GROUND WALL WASHING

High performance in-ground luminaire created to produce vertical illuminance for brightening the architectures and exterior landscapes, it features asymmetrical elliptical light distributions for wall washing applications. The luminaire with special structure and high quality optical components for enhanced visual comfort. A variety of lumen packages and optics are available for different project requirements.

Material: aluminum body with PMMA lens and tempered glass



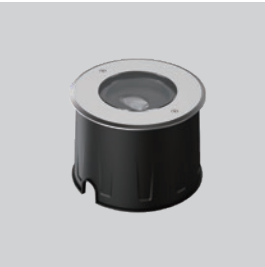

QUICKINFO


In-ground wall wash10W, 1 high-power LED
Input voltage DC24V
C.V. power supply ordered separately








CE

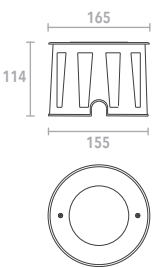
IP67

IK10

DIMENSIONS



CODE	Optic	Light color	Control	Finish color	Luminous flux
1910W10	 elliptic 30°x60° 3060	 2700K 2780	ON/OFF	 silver 01	800lm
	 elliptic 40°x85° 4085	 3000K 3080			
	 elliptic 50°x95° 5095	 4000K 4080			



QUICKINFO


In-ground wall wash30W, 1 high-power LED
Input voltage DC24V
C.V. power supply ordered separately








CE


IP67

IK10

DIMENSIONS



CODE	Optic	Light color	Control	Finish color	Luminous flux
1910W30	 elliptic 30°x60° 3060	 2700K 2780	ON/OFF	 silver 01	2,400lm
	 elliptic 40°x85° 4085	 3000K 3080			
	 elliptic 50°x95° 5095	 4000K 4080			



QUICKINFO


In-ground wall wash 20W, 1 high-power LED
Input voltage DC24V
C.V. power supply ordered separately








CE


IP67

IK10


DIMENSIONS




CODE	Optic	Light color	Control	Finish color	Luminous flux
1910W20	 elliptic 30°x60° 3060	 2700K 2780	ON/OFF	 silver 01	1,600lm
	 elliptic 40°x85° 4085	 3000K 3080			
	 elliptic 50°x95° 5095	 4000K 4080			



[30°X60°]



[40°X85°]



[50°X95°]

