
YORK L



POWERFUL AND UNIFORM

Exterior rated linear LED luminaire for wall washing and grazing applications on facade where required powerful lighting. Standard length 1000mm and customized lengths on request. Uniform light color coverage even on close-up installations thanks to PMMA optical system. Continuous line, no shadow where the luminaires are jointed. Power supply included.

Material: aluminum body with PMMA lens and tempered glass

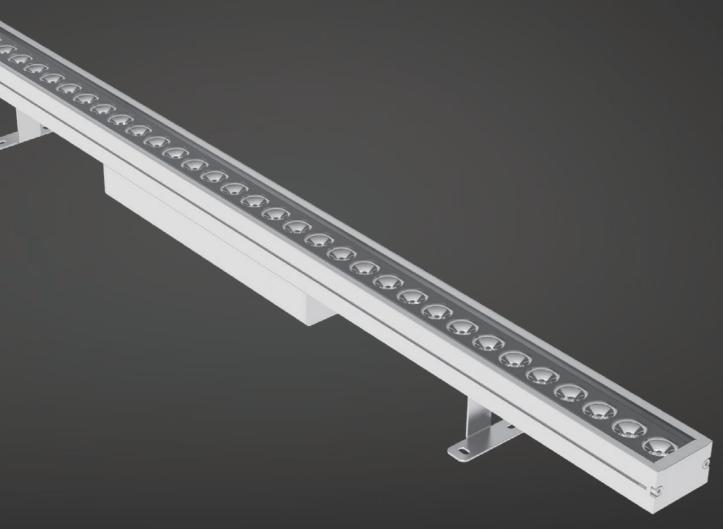





OPTIC OPTIONS













elliptic

LIGHT SOURCE











RGB



RGBW

CONTROL OPTIONS



ON/OFF







DALI

FINISH COLORS



silver





RAL on request



INSTALLATION










-20°C~50°C

ceiling/wall

ground

LINEAR SYSTEMS . DAOU 2022

YORK L

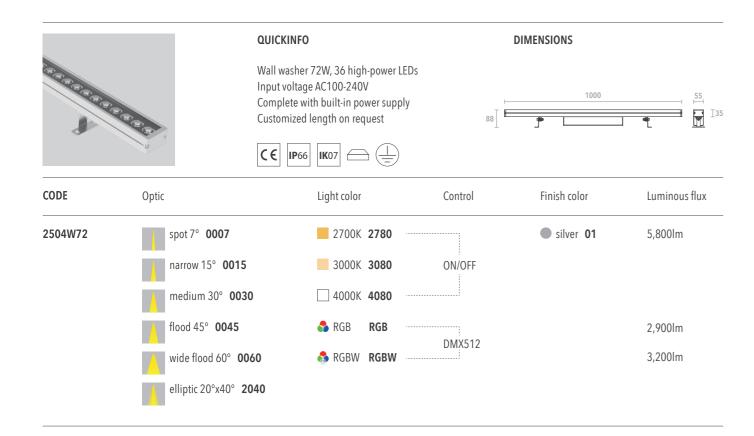



2504A1 anti-glare visor aluminum



2504A2 anti-glare grille



