


DELTA

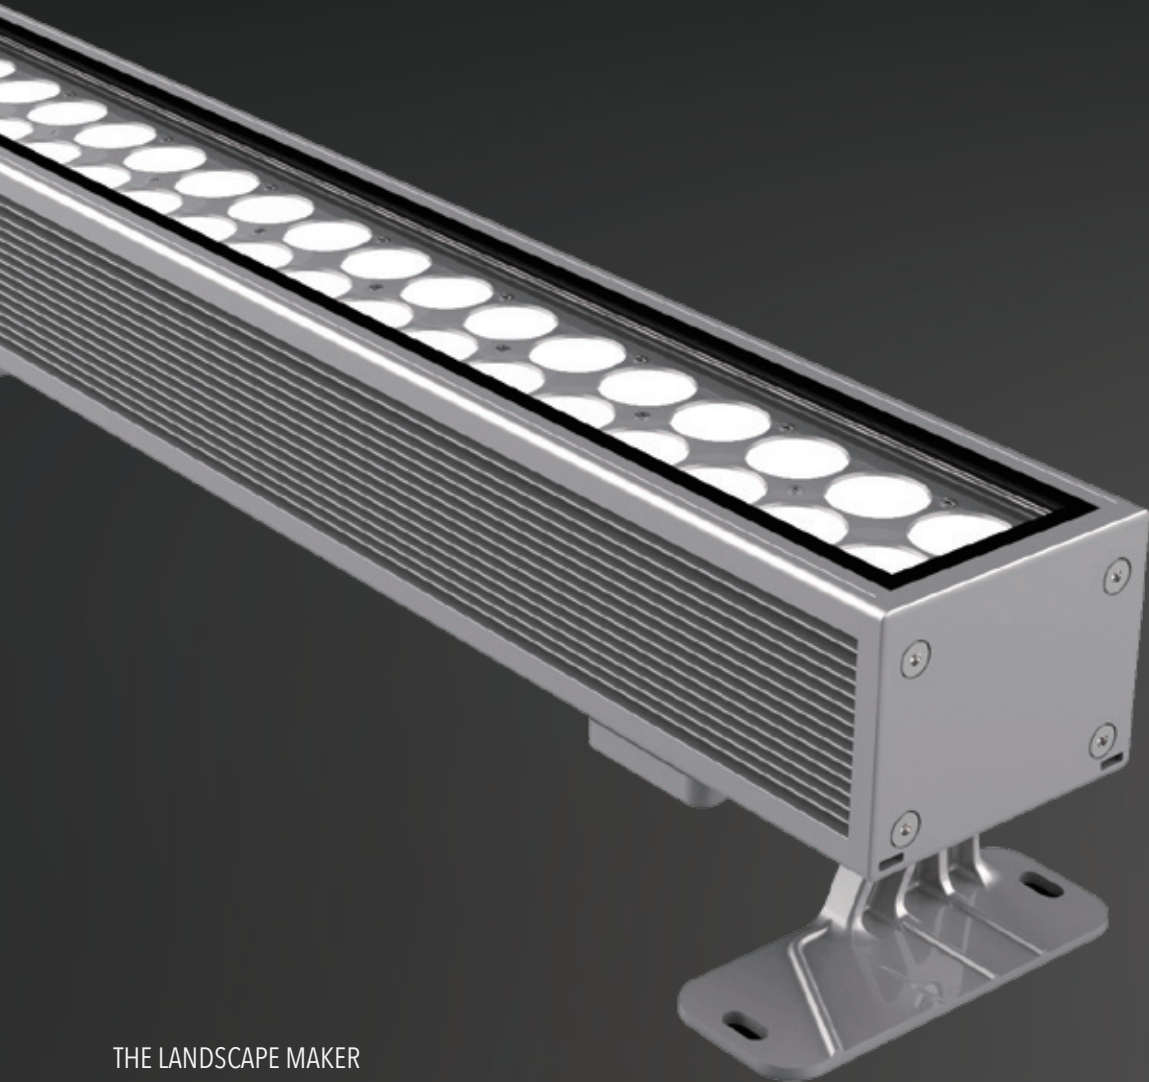


THE LANDSCAPE MAKER

Premium exterior floodlight created for lighting applications where a high-output and long-throw illumination is required, such as large scale outdoor structures ranging from bridges and building facades to monuments and landscapes. The luminaire offers more beam choices with different lumen output, ideal for accent lighting, flood lighting and wash lighting.


Material: aluminum body with polycarbonate lens and tempered glass




OPTIC OPTIONS

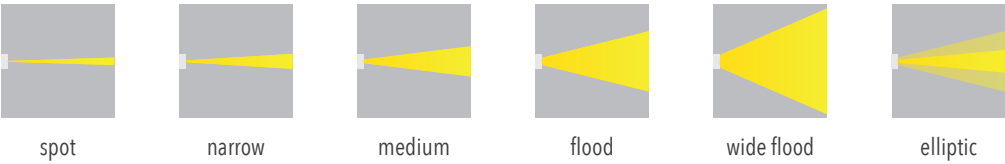


LIGHT SOURCE

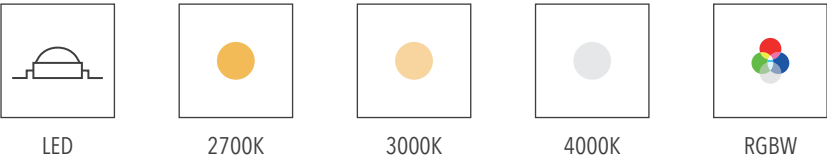



CONTROL OPTIONS

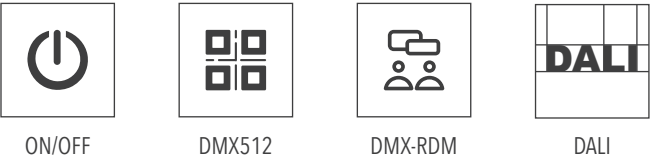


FINISH COLORS



INSTALLATION

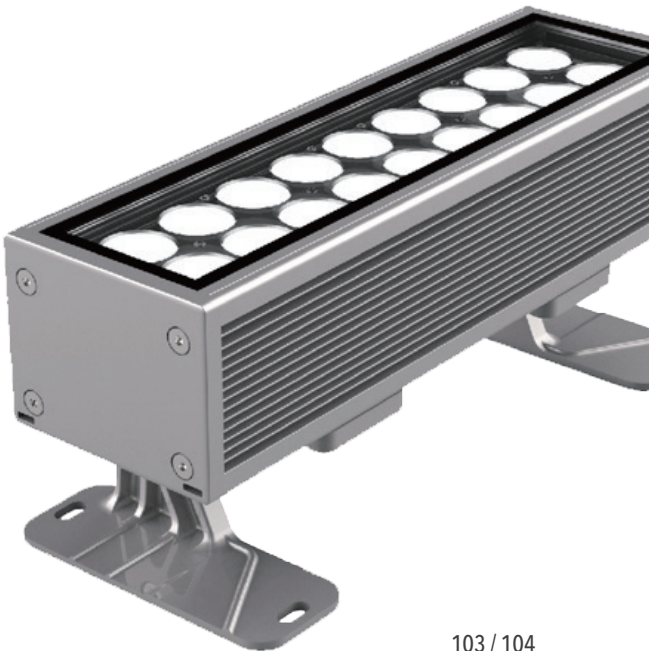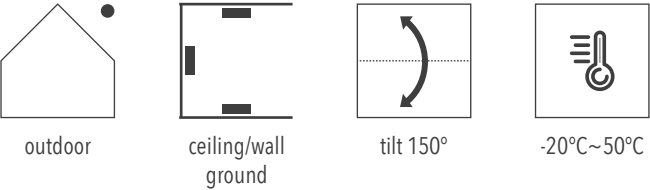



QUICKINFO

Floodlight 120W, 18 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

CE

IP66

IK08











DIMENSIONS


400

170

120

95

CODE	Optic	Light color	Control	Finish color	Luminous flux
0819W120	 spot 6° 0006	 2700K 2780	ON/OFF	 silver 01	9,600lm
	 narrow 12° 0012	 3000K 3080			
	 medium 30° 0030	 4000K 4080			
	 wide flood 45° 0045				
	 wide flood 60° 0060				
	 elliptic 10°x70° 1070				



QUICKINFO

Floodlight 120W, 18 high-power LEDs (4-in-1)
Input voltage AC100-240V
Complete with built-in power supply

CE

IP66

IK08






DIMENSIONS


400

170

120

95

CODE	Optic	Light color	Control	Finish color	Luminous flux
0819W120	 narrow 15° 0015	 RGBW RGBW	DMX512	 silver 01	6,000lm
	 medium 30° 0030				
	 elliptic 10°x60° 1060				



QUICKINFO

Floodlight 160W, 24 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

CE

IP66

IK08











DIMENSIONS


500

170

120

95

CODE	Optic	Light color	Control	Finish color	Luminous flux
0819W160	 spot 6° 0006	 2700K 2780	ON/OFF	 silver 01	12,800lm
	 narrow 12° 0012	 3000K 3080			
	 medium 30° 0030	 4000K 4080			
	 wide flood 45° 0045				
	 wide flood 60° 0060				
	 elliptic 10°x70° 1070				



QUICKINFO

Floodlight 160W, 24 high-power LEDs (4-in-1)
Input voltage AC100-240V
Complete with built-in power supply

CE

IP66

IK08






DIMENSIONS


500

170

120






95

CODE	Optic	Light color	Control	Finish color	Luminous flux
0819W160	 narrow 15° 0015	 RGBW RGBW	DMX512	 silver 01	8,000lm
	 medium 30° 0030				
	 elliptic 10°x60° 1060				














QUICKINFO


Floodlight 240W, 36 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply



DIMENSIONS








CODE	Optic	Light color	Control	Finish color	Luminous flux
0819W240	 spot 6° 0006	 2700K 2780	ON/OFF	 silver 01	19,200lm
	 narrow 12° 0012	 3000K 3080			
	 medium 30° 0030	 4000K 4080			
	 wide flood 45° 0045				
	 wide flood 60° 0060				
	 elliptic 10°x70° 1070				









QUICKINFO


Floodlight 240W, 36 high-power LEDs (4-in-1)
Input voltage AC100-240V
Complete with built-in power supply



DIMENSIONS








CODE	Optic	Light color	Control	Finish color	Luminous flux
0819W240	 narrow 15° 0015	 RGBW RGBW	DMX512	 silver 01	12,000lm
	 medium 30° 0030				
	 elliptic 10°x60° 1060				














QUICKINFO


Floodlight 300W, 48 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply



DIMENSIONS








CODE	Optic	Light color	Control	Finish color	Luminous flux
0819W300	 spot 6° 0006	 2700K 2780	ON/OFF	 silver 01	24,000lm
	 narrow 12° 0012	 3000K 3080			
	 medium 30° 0030	 4000K 4080			
	 wide flood 45° 0045				
	 wide flood 60° 0060				
	 elliptic 10°x70° 1070				









QUICKINFO


Floodlight 300W, 48 high-power LEDs (4-in-1)
Input voltage AC100-240V
Complete with built-in power supply




DIMENSIONS



CODE	Optic	Light color	Control	Finish color	Luminous flux
0819W300	 narrow 15° 0015	 RGBW RGBW	DMX512	 silver 01	15,000lm
	 medium 30° 0030				
	 elliptic 10°x60° 1060				



0819A1 anti-glare visor **aluminum**
suitable for all models



0819A2 honeycomb **PC**
suitable for all models



