



PRODUCT DATASHEET

Last information update: Mar. 2025



Wiring

Power/DMX input cable MALE connector 1,000 mm
Power/DMX output cable FEMALE connector 1,000 mm

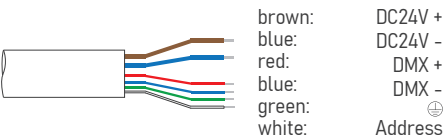

CUBE-4

0822W20

Architectural LED floodlight for outdoor applications

Technical Features

Power	20W
Input voltage	DC24V (constant voltage)
Insulation class	III
Delivered flux	900 lm ±10%
Light distribution type	Symmetrical / elliptical
Beam angle	8°, 15°, 20°, 30° / 15°x60°
Light colour / CCT	RGBW
CRI	-
Source type	LED (4-IN-1)
LED number	4
MacAdam step	-
Power supply	Not included
Control	DMX512 (built-in DMX decoder)
Protection index	IP66
Impact resistance	IK08
Lifetime	50,000 hours Ta=25°C

Construction

High weather-resistant fluorocarbon painted die-cast aluminum body, tempered glass cover, polycarbonate optical lenses.

Temperature Limits

Ambient operating temperature	from -20°C to +50°C
Storage temperature	from -40°C to +70°C


Installation

Surface mounted with adjustable base (standard).

Finish Colours


RAL9023 Pearl Dark Grey (standard). Other RAL colours on request.

Optional Accessories




anti-glare grille (for models with optics <= 30°)
*can not be ordered separately

A01




honeycomb louvre
*can not be ordered separately

A02




anti-glare visor
*can not be ordered separately




A06




U-bracket
*can not be ordered separately



A11




adapter (for $\Phi 48$ mm poles)
*can not be ordered separately



A12




clamp (for $\Phi 114$ mm poles)
*can not be ordered separately



A13




plate (for $\Phi 67\sim 325$ mm T>=4 poles)
*can not be ordered separately



A14




strap (for $\Phi 168\sim 268$ mm trees)
*can not be ordered separately




A15



spike
*can not be ordered separately




A16



leader cable with female 6-pin waterproof connector for Power/DMX
* specify cable length to complete order

LC6



extension cable with male and female 6-pin waterproof connector for Power/DMX
* specify cable length to complete order

EC6

Ordering Information

example: 0822W20.0008.4130K.01+A01

0822W20 · [] · [] · [] + []

product	beam angle		light colour / CCT		finish colour		accessory	
CUBE-4-20W	0008	8°	4130K	RGB+3000K	01	RAL9023	A01	anti-glare grille
	0015	15°	4140K	RGB+4000K			A02	honeycomb louvre
	0020	20°					A06	anti-glare visor
	0030	30°					A11	U-bracket
	1560	15°x60°					A12	pole adapter
							A13	pole clamp
							A14	pole plate
							A15	strap
							A16	spike
							LC6	leader cable
							EC6	extension cable