


PRODUCT DATASHEET

Last information update: Mar. 2025

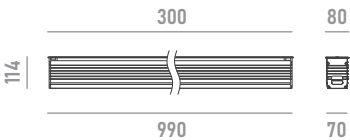

DAN LITE

1917W11(0.3)

Adjustable in-ground LED wallwasher for outdoor applications

Technical Features

|                         |                                                |
|-------------------------|------------------------------------------------|
| Power                   | 11W                                            |
| Input voltage           | AC100-240V                                     |
| Insulation class        | I                                              |
| Delivered flux          | 880 lm ±10%                                    |
| Light distribution type | Symmetrical / elliptical                       |
| Beam angle              | 8°, 12°, 20°, 30°, 45°, 60° / 10°x70°, 15°x30° |
| Light colour / CCT      | 2700K, 3000K, 4000K                            |
| CRI                     | 80                                             |
| Source type             | LED                                            |
| LED number              | 8                                              |
| MacAdam step            | 5                                              |
| Power supply            | Built-in                                       |
| Control                 | ON/OFF                                         |
| Protection index        | IP67                                           |
| Impact resistance       | IK10                                           |
| Lifetime                | 50,000 hours Ta=25°C                           |

Construction

Aluminum body, stainless steel trim, tempered glass cover, PC optical lenses, aluminum recessed box.

Temperature Limits

|                               |                     |
|-------------------------------|---------------------|
| Ambient operating temperature | from -20°C to +50°C |
| Storage temperature           | from -40°C to +70°C |

Installation

Ground recessed with recessed box (standard).

Finish Colours


Trim in Stainless Steel (standard). Other RAL colours on request.

Wiring

Power input cable OPEN END 1,000 mm




Optional Accessories




honeycomb louvre  
\*can not be ordered separately

A02



anti-glare grille  
\*can not be ordered separately

A03



anti-slip glass  
\*can not be ordered separately

A18

Ordering Information

example: 1917W11(0.3).0008.2780.01+A02

1917W11(0.3) · [ ] · [ ] · [ ] + [ ]

| product              | beam angle |         | light colour / CCT |            | finish colour      | accessory |                   |
|----------------------|------------|---------|--------------------|------------|--------------------|-----------|-------------------|
| DAN LITE 11W (300MM) | 0008       | 8°      | 2780               | 2700K RA80 | 01 stainless steel | A02       | honeycomb louvre  |
|                      | 0012       | 12°     | 3080               | 3000K RA80 |                    | A03       | anti-glare grille |
|                      | 0020       | 20°     | 4080               | 4000K RA80 |                    | A18       | anti-slip glass   |
|                      | 0030       | 30°     |                    |            |                    |           |                   |
|                      | 0045       | 45°     |                    |            |                    |           |                   |
|                      | 0060       | 60°     |                    |            |                    |           |                   |
|                      | 1070       | 10°x70° |                    |            |                    |           |                   |
|                      | 1530       | 15°x30° |                    |            |                    |           |                   |