



PRODUCT DATASHEET

Last information update: Mar. 2025

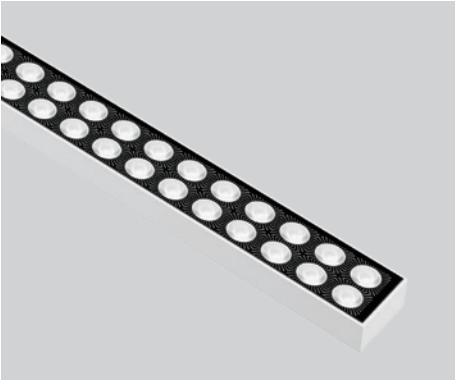

YORK-S

2507W50(0.5)

Linear LED wallwasher for outdoor applications

Technical Features

Power	50W
Input voltage	AC100-240V
Insulation class	I
Delivered flux	4,000 lm ±10%
Light distribution type	Symmetrical / elliptical
Beam angle	20°, 30°, 45°, 60° / 18°x50°, 20°x40°
Light colour / CCT	2700K, 3000K, 4000K
CRI	80
Source type	LED
LED number	36
MacAdam step	5
Power supply	Integrated
Control	ON/OFF
Protection index	IP66
Impact resistance	IK07
Lifetime	50,000 hours Ta=25°C

Construction

Powder painted extruded aluminum body, tempered glass cover, polycarbonate optical lenses.

Temperature Limits

Ambient operating temperature	from -20°C to +50°C
Storage temperature	from -40°C to +70°C

Installation

Surface mounted with adjustable bracket (standard).

Finish Colours

RAL9003 Signal White (standard). Other RAL colours on request.

Wiring

Power input cable OPEN END 200 mm



Ordering Information

example: 2507W50(0.5).0020.2780.01

2507W50(0.5) · · ·

product	beam angle		light colour / CCT		finish colour	
YORK-S-50W (500MM)	0020	20°	2780	2700K RA80	01	RAL9003
	0030	30°	3080	3000K RA80		
	0045	45°	4080	4000K RA80		
	0060	60°				
	1850	18°x50°				
	2040	20°x40°				